

DURABASE

BUILDING FOR THE FUTURE



Standard & Plus Assembly Instructions

V1

01.24

Pre-Fabricated Bases & Walls



Wye Valley Engineering Ltd
Durabase House, Netherwood Road,
Rotherwas Industrial Estate
Hereford
HR2 6JU

Tel: 01432 266507


sales@durabase.co.uk
www.durabase.co.uk

What's in the box?

Other items like DPC, glue, weed suppressant membrane, mortar and brick slips are included in the box depending on the style of base ordered.



M8 x 20 Hex nut & bolt
Modular wall to Modular wall



Fixing down plate
Base to Pad



10 x 50 Sleeve anchor
Fixing down leg to pad



10 x 110 Hex anchor
Base back sill to house



10 x 19 self-drill screw
Modular Wall to base



10 x 110 Hex Nut & bolt
Splitter beam



50mm Self-tapping screw
Skirt to base & Standarded flooring to joist



60mm Nylon frame fixing
Modular wall to house wall



60mm self-tapping screw
FH Frame to base fixing



Jacking leg & plate
Levelling the bass



M6 x 60 nut & bolt
Joist to hanger



Top hat
50mm insulation carrier

NOTE: Not all items on this list will apply to your order. Base type and spec will vary items.

Contained within this instruction manual are step-by-step instructions to guide you through the installation of your Durabase and wall system.

IMPORTANT

Read ALL the instructions completely BEFORE commencing any work. Understanding these instructions and familiarity with procedures will make the build process much easier and an enjoyable project to undertake. **Not reading the instructions could lead to problems later on in the build process.**

Health and Safety

As with any type of construction work, there are inherent dangers when assembling a Durabase. The following advice is designed to supply the installer with general health, safety and environmental information that may be required during the assembly of a Durabase. The information provided is a guide to 'best practice' but cannot be considered as comprehensive.

You are advised to work safely at all times.

1. General Site Safety

All sites are different and have different hazards. Have a general regard for what can cause harm. The construction site itself should be made a restricted area. Particularly at risk are children and animals. You also need to consider the security issue.

Organise your space. Don't open boxes haphazardly and leave components lying around that can get damaged, lost or pose a trip hazard. Be aware of the weather forecast. Wet conditions cause specific hazards. Put controls in place to manage any possible vehicular movement on site. Protect the environment by disposing of your rubbish appropriately.

2. Personal Protective Equipment (PPE)

The following PPE should be worn throughout the construction:

Safety footwear

The following PPE should be worn under certain conditions:

Safety glasses

Hearing protection

Dust mask

Gloves

Follow machinery guidelines where applicable

Be aware of sharp edges on steelwork

It is advisable to have a first aid kit handy – just in case.

Preparing the site

Refer to the pad plan

A Durabase sits on a number of concrete pads which are required under each fixing down leg.

Refer to the pad plan provided for the location and number of concrete pads required.

The back sill does not require concrete pads because this is fixed to the house wall. Any legs fitted to the back sill are used for levelling and need to rest on something firm e.g. paving slabs or blocks.

For each pad dig out a hole, **450mm square x 450mm deep**. (The 450mm depth is a minimum and it may be necessary to check the required depth with local building regulations).

The pads should be dug down into firm natural ground, but other factors should be taken into account such as:


The type of subsoil

Presence of trees/roots

Location and invert of drains

On clay, sand or peaty subsoil further excavation will be required.

Fill the holes with concrete (C40 grade recommended) to the level specified on the pad plan. This measurement is from the top of the pad to the steel (DPC) level.

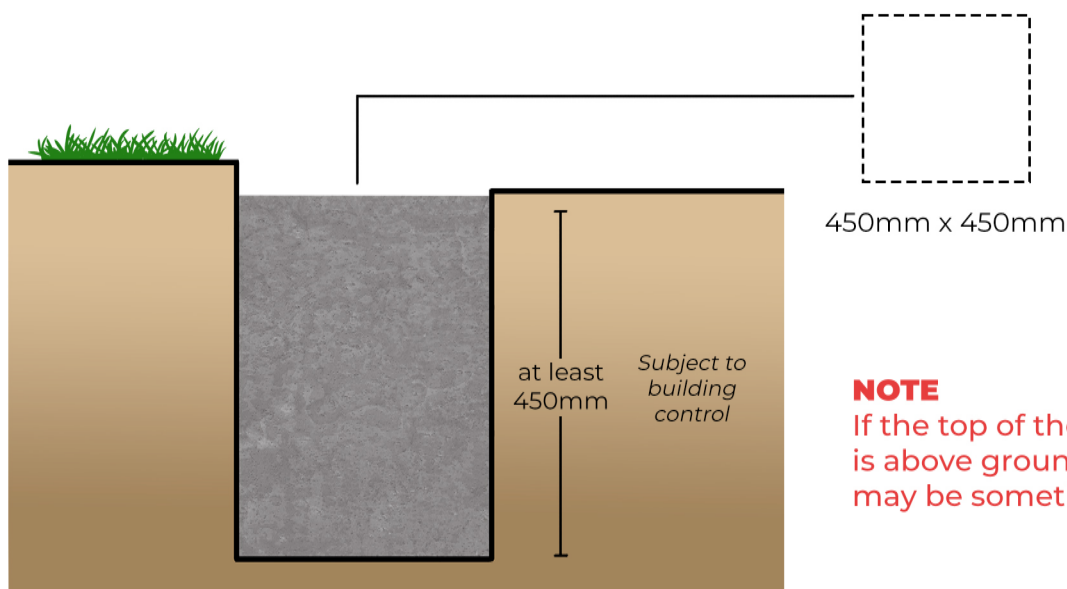

NOTE

If the top of the concrete pad is above ground level, there may be something wrong!

It is imperative to dig out beneath the base to provide adequate airflow. On all Durabases this is **150mm down from the top of the back sill**.

IMPORTANT

This area should then be covered by the supplied breathable weed suppressant membrane to prevent weed/plant growth.

1. Base assembly

Refer to the steelwork plan

1.0 Screw **lock nuts** onto all **jacking legs**. Screw jacking legs into the nuts welded onto the underside of the back sill section. Position the load-bearing plates (70mm circular washers) under all jacking legs. These jacking legs should be placed on something firm to prevent sinking e.g. paving slabs or blocks.



1.1 Position the 80x80 back sill section against the house wall in the required position, the setting out height of this section depends on the thickness of the underfloor insulation being used. **Refer to the table below.**

Durabase Type	Height (from the top of the chipboard to the top of the back sill)
Standard	18mm
75	106mm
100	131mm
120	151mm

IMPORTANT


When matching your extension floor level to the existing house floor level you will also need to add the thickness of your floor finish to these measurements.



Durabase Plus Note - The back sill section (against the house wall) will be shorter than the overall base size because of the way the Durabase Plus is constructed. The back sill section is set down lower than the side sills to allow for the ply and underfloor insulation.



If the chipboard floor panels land lower than the properties DPC it will be necessary to insert a vertical damp-proof barrier.

1.2 Ensure the back sill is level then pilot drill through the fixing holes using a 10mm masonry drill bit.

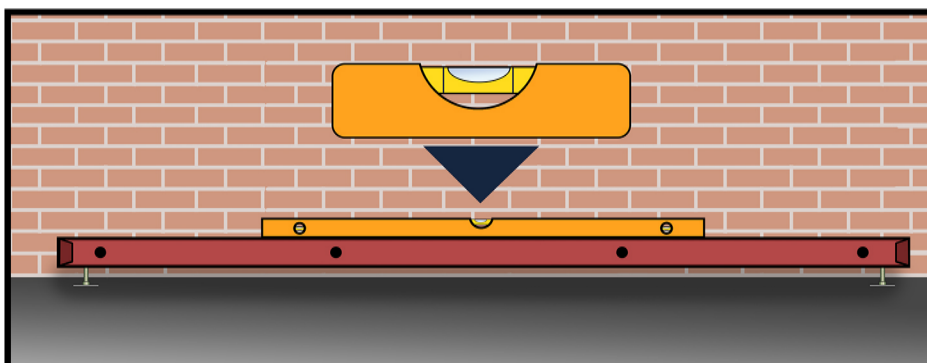


Base assembly continued

1.3 Remove the back sill section and re-drill pilot holes to a depth of **70mm** using a **16mm masonry drill bit**. Using the **10 x 110 hex anchors**, insert the anchor sleeve into the holes and remove the bolts. Replace the back sill section, insert bolts and tighten using a **17mm socket**.


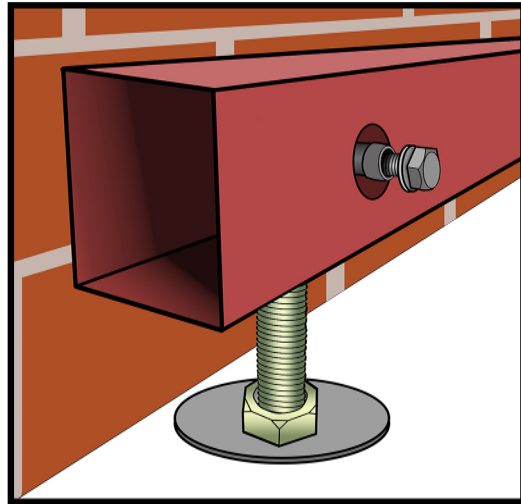
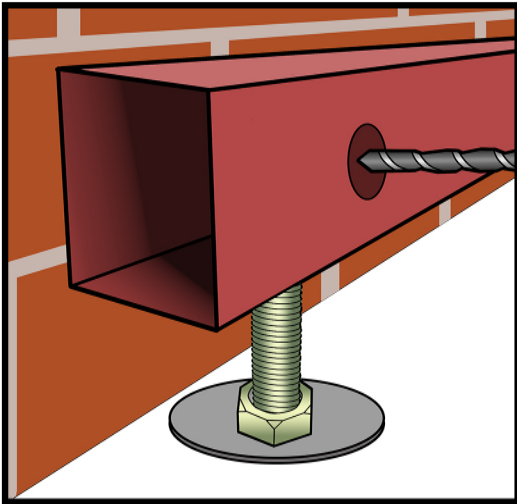


1.4 Assemble **fixing down legs**, including lock nuts, and screw into the nuts welded onto the underside of the side sills where there is a pad.





Note

Use only one fixing down leg assembly on each concrete pad. The second leg landing on a pad needs to be a jacking leg.

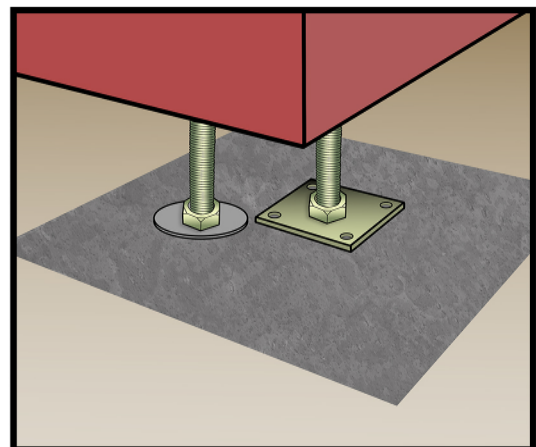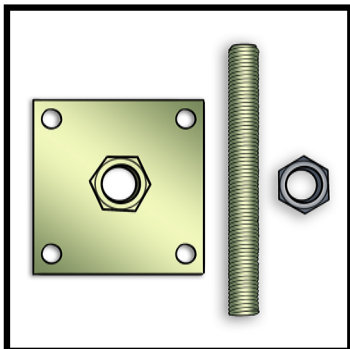

Base assembly continued

1.5 Fit the side sills to the back sill section by locating them onto the pre-welded studs with the corner fixing bracket. Fix with nut supplied but do not fully tighten at this stage.

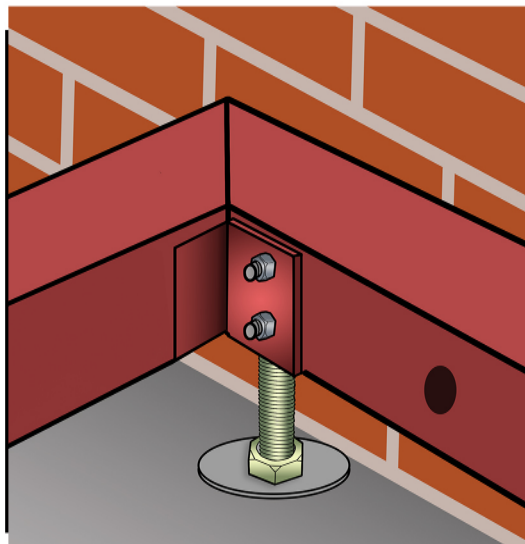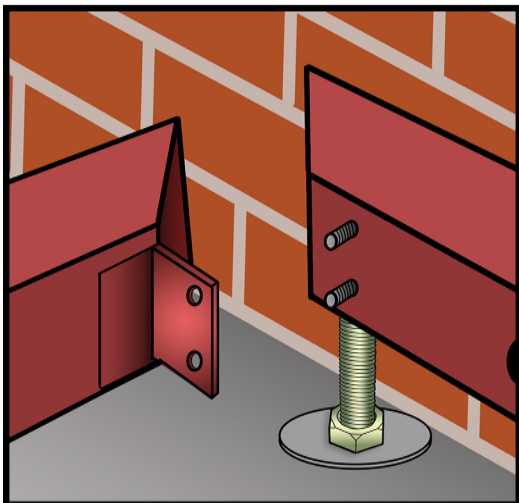

Durabase Plus Note - The side sill sizes vary depending on the model of Durabase you have ordered.



The Durabase 100 and 120 have a larger side section to allow for the thicker insulation required to pass building regs.



1.6 Screw the **jacking legs** and **fixing down legs** into the nuts welded onto the underside of the front sill section.

1.7 Working your way around, adjust the jacking legs to the required height and level using a spirit level. Check that the base is square and tighten all joints. Re-check levels and tighten lock nuts on the jacking legs.



Your Durabase should now be square and level!



Base assembly continued

1.8 Slot the floor joists into the 'u' support brackets, and secure using **M6 x 60 bolts** and nuts supplied. Tighten with **10mm spanner**. The joist supports, if supplied, should be fitted centre of the joist length and the jacking legs should be adjusted and locked at this stage.



Note

Not all Durabase products are supplied with joist supports. Similar to jacking legs, joist supports should be placed on something firm to avoid sinking e.g. paving slabs or blocks.

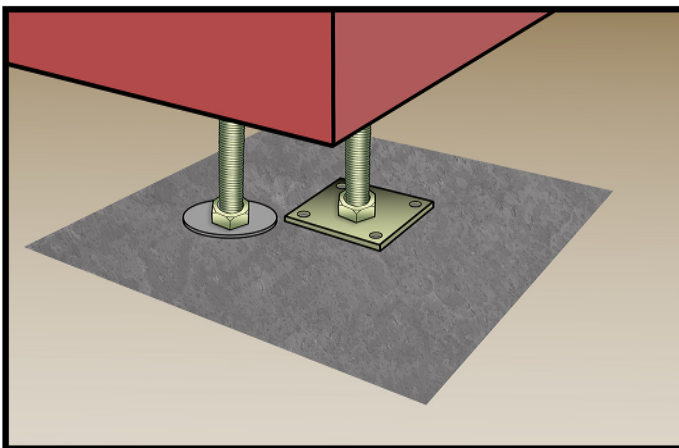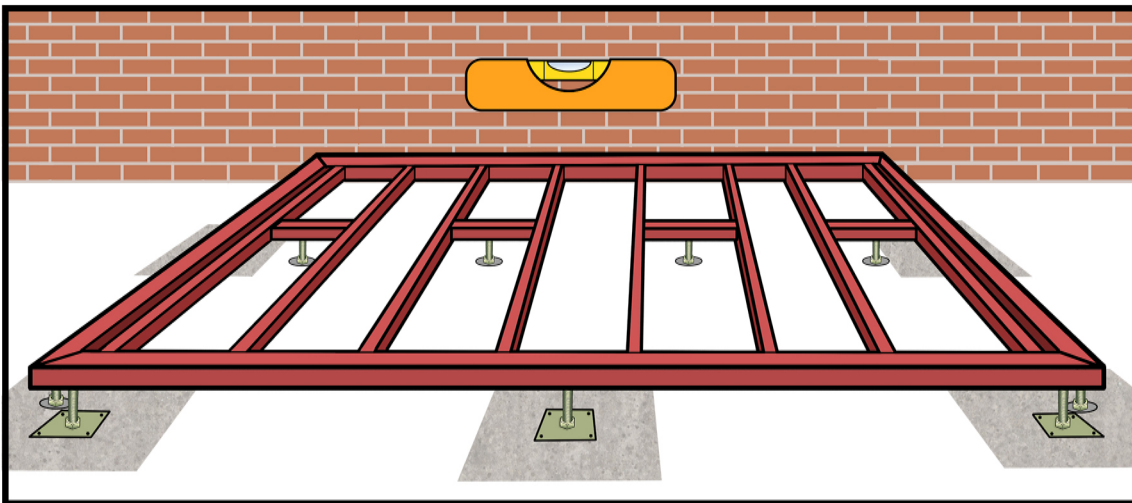


1.9 Fix leg assembly down to concrete pad using **10 x 50mm sleeve anchors** supplied. Pre-drill concrete using a **10mm masonry bit**. Only one fixing is required per leg.

2. Fitting skirt panels

Refer to walls and skirt plan

For plain and rendered skirts, please see additional information at the bottom end of this section.


2.0 Lay out the skirt sections in the order they are to be fitted. The panels are lettered to correspond with the skirt plan and ensure the brick slips are flush with the top edge. Fit the panels so the top edge lines up with the top edge of the steel base.

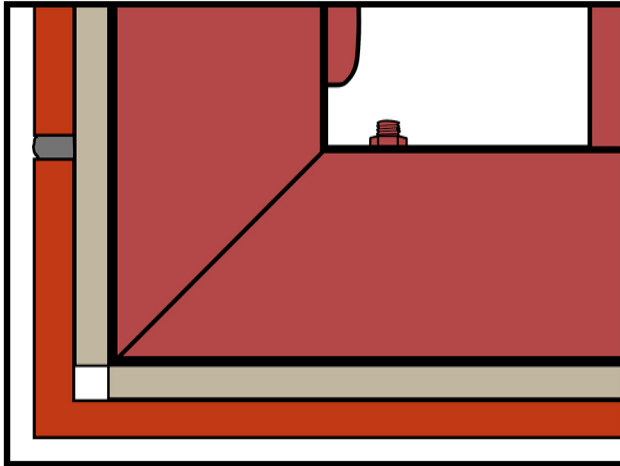

Note

The ends of the panels that correspond with an external corner of the base frame must line up with the edge of the steel base frame. Do not overlap panels on the corners.

2.1 Using the **50mm self tapping screws** supplied, fix where the brick slips are still to be fitted and through perpendicular mortar joints if extra fixing is required.

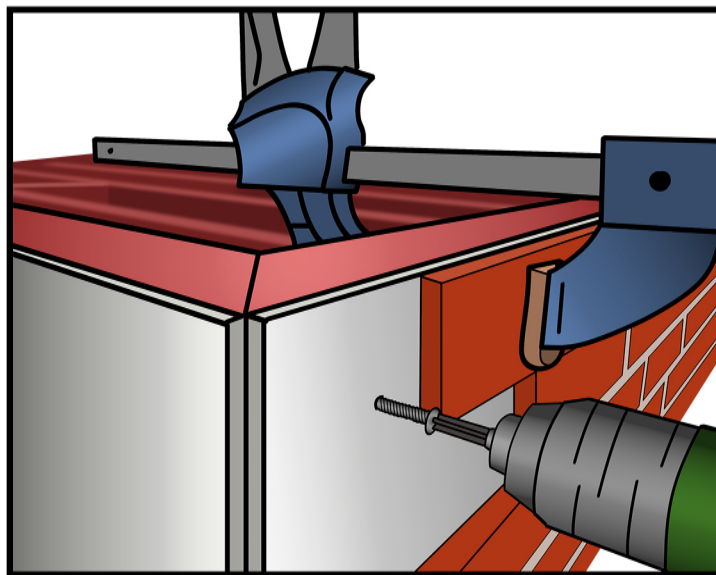



Fitting skirt panels continued

2.2 Once fully constructed, use the adhesive supplied to fix the spare brick slips in place. You will need to use some **10mm spacers** to position the brick slips on the skirt panels. Press the bricks firmly into place.



Note

Be aware of the weather forecast during the building process, the construction adhesive supplied can be used in temperatures between 5°C and 35°C.

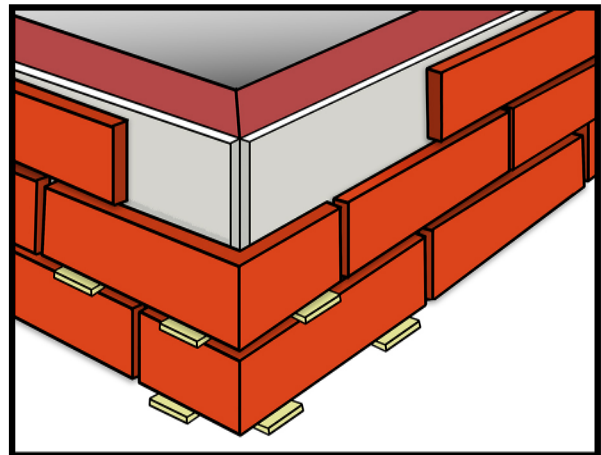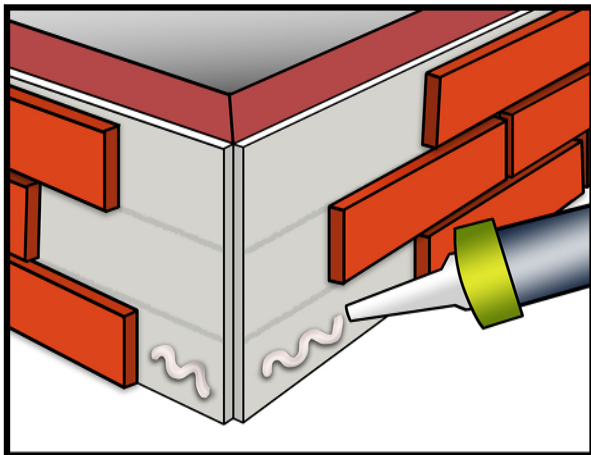


For mortar/pointing instructions skip to **part 4**.



Durabase Plus Note - Plus 100 bases with a 225mm skirt come with an un-bricked 35mm cement board bottom to allow for backfilling from the outside.

This additional 35mm enables us to have the air gap under the base that is required.

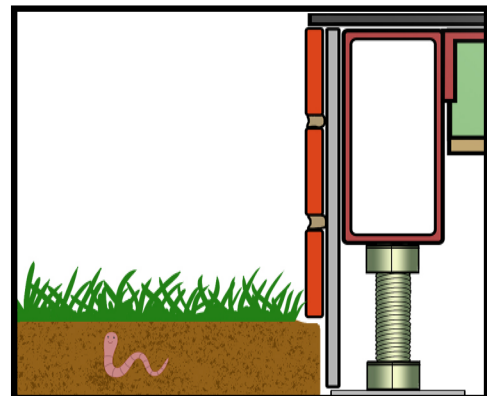

Ready to Render and Plain Skirts

Fix in the same way as brick skirts using the **50mm screws** provided. You will need to cut the boards to length before fitting. It is recommended that air vents be fitted in the side skirt panels.



Note: On **Plus bases** the vent location is cut into the steel so vent cut outs in the skirt must match the steels vent locations. Vents are cut oversize in the steel, cut skirts to air brick size.

For render finish guidelines please look at **section 7**.

3. Fitting the walls

Refer to walls and skirt plan

Note


Please check with local authorities if a Radon Gas barrier is required as this may need to be fitted before the walls.

3.0 Before fitting the walls, fill the area of the base below with insulation. This ensures the entire floor area has insulation fitted.



Durabase Plus Note - Make sure you have fitted the additional steel rail to carry the internal edge of the wall carcass.


3.1 Prior to fitting the DPC lay a line of construction adhesive (supplied) along the join between the steel frame and the back edge of the skirt panel.

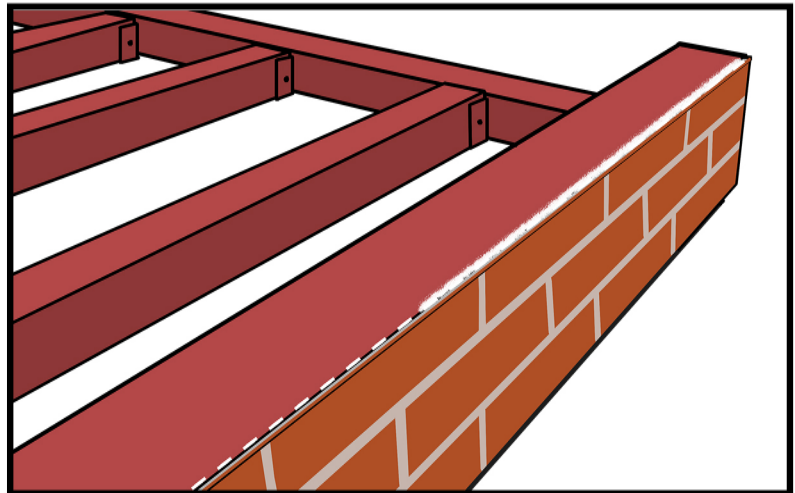

3.2 Lay the DPC so that the outer edge lines up with the outer edge of the skirt panel (allowances may need to be made for render thickness or other external finishes).

Cut to length and press into the bead of adhesive.

Lay another bead of construction adhesive along the top edge of the DPC **approximately 15mm** back from the outer edge.

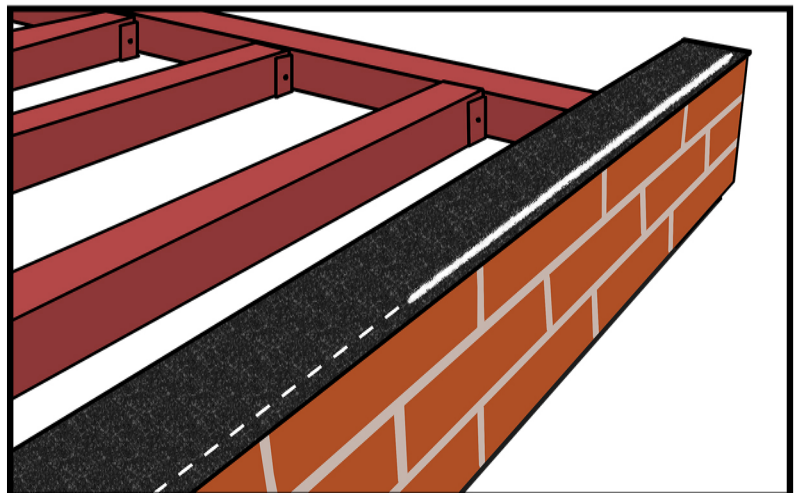

Fitting the walls continued

3.3 Starting with the first panel against the house wall place a bead of mastic **approximately 15mm** from the outer edge of the end that butts against the house. Offer the panel up to the house wall but do not fix it in position.


The inside edge of the steel wall carcass should line up with the centre of the first parallel floor joist.

Reminder: The wall panels are heavy on the outer side and could tip over easily.

Note

For walls with more than one level, fix the entire lower level first. Continue to assemble subsequent levels once the lower level is fixed.

3.4 Following the layout plan, place the next wall panel so that it continues on from the first, seal joins with a bead of mastic approx. 20mm from the outer edge. Insert the four **M8 x 20 bolts** supplied to fix the panels together. Do not fully tighten at this stage. Continue until all wall panels are in place.

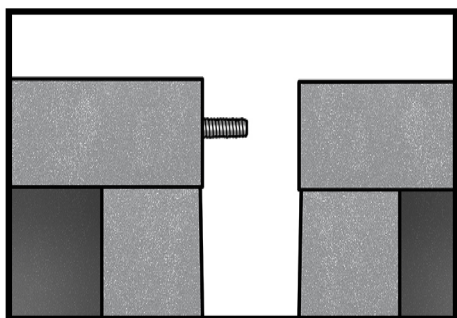

Note

If you cannot utilise the holes provided, drill a 10mm diameter hole through the metalwork in the required position. Secure with the frame fixings supplied.

3.5 Once all panels are correctly sited, you can secure them to the house wall using the 60mm nylon frame fixings. Check that the panel is upright before drilling an 8mm diameter hole 80mm deep through the holes provided into the house wall.




Fitting the walls continued

3.6 Once fixed to the house wall, check that all panels are in line. Where the skirt has the same finish as the walls, ensure the wall is set flush with the skirt. For render walls and brick skirts, ensure the render wall is set back the thickness of the render finish being applied.



The panels can now be fixed to the steel base using the **10 x 19 hexagon-headed** self tapping screws supplied. Fix the walls to the ring beam and the first joist on the inside edge.

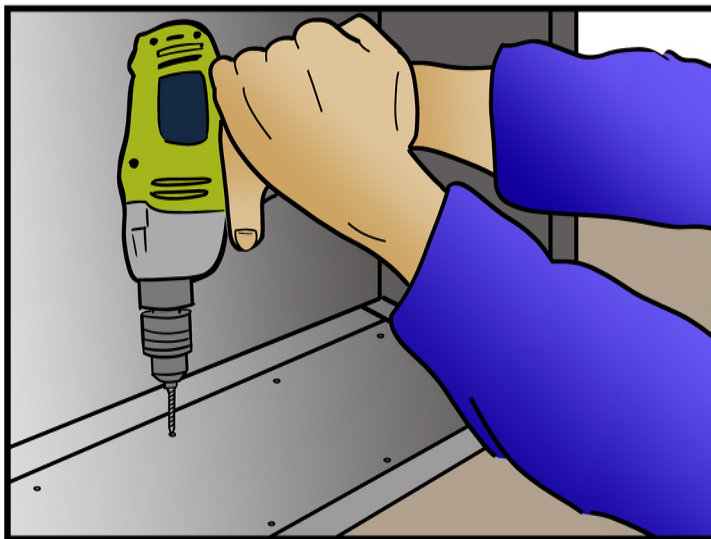

Note

It will help to pre-drill the wall panels with a **5.5mm diameter** drill, taking care not to drill through the steel base. Fix as close to the flange edges as possible and fix through double flanges where possible.
*Max spacing for fixings: **600mm** on each edge.*

Then tighten all M8x20 bolts in the panels making sure that all panels are correctly positioned.

4. Mortaring the walls and skirt

4.0 Once fully constructed, seal the joins in the brick backer panels with the construction adhesive supplied. Use the same adhesive to stick the spare brick tiles in place.

Note



You will need to use some 10mm spacers to position the brick slips on the skirt panels. Press bricks firmly into place.

4.1 To point the joints, mix the mortar supplied with water until a consistency of a stiff cream is achieved. Fill the joints around the bricks completely using a pointing bag, these can be purchased from Durabase. Ensure you follow the instructions on the mortar supplied.

Note

Check correct consistency by filling the bag, the mortar should hang from the end of the nozzle when the bag is shaken down.

4.2 Allow the mortar to dry until fairly firm. We would recommend that the mortar is firm enough that when pushed in with a finger only a small indentation is left behind. It should have a dull finish, be moist but not wet and somewhat gritty. Use a curved pointing tool to strike off mortar and then, when almost dry, remove any remaining mortar with a soft brush.

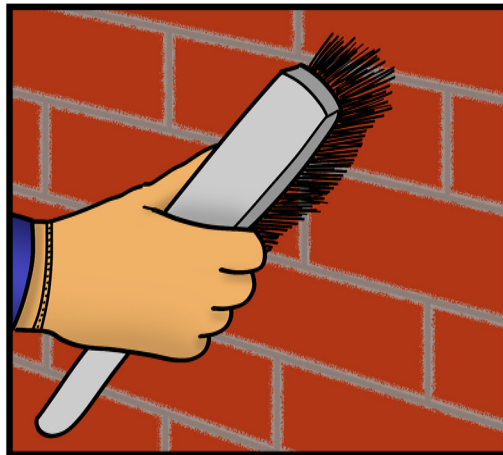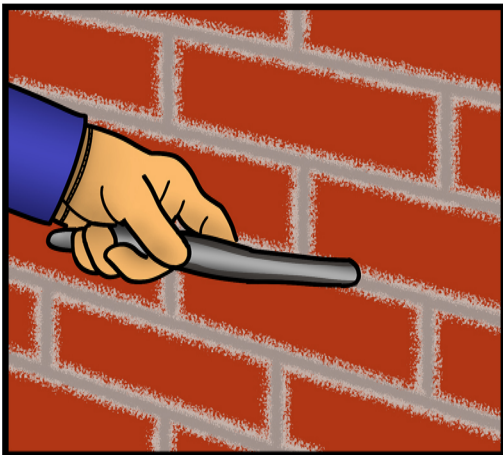

Note

Do not be tempted to strike off when the mortar is too moist. Overworking the mortar may create colour changes. Every time you work it, the moisture is drawn out and could result in a lighter-coloured mortar when dry.

It is advised to fit the conservatory or remainder of the extension at this stage.

Please follow your conservatory or extensions manufacturer's assembly guidelines.

Conservatory sills can be secured to the top of the walls and steel base, using the 60mm long self-drilling screws supplied.

5. Flooring



Durabase Standard flooring

+ Skip to 6.0 for Durabase Plus




5.0 Place top hat insulation securing brackets at suitable intervals over the floor joists.

5.1 Cut to size and lay the polystyrene to fill the gaps between the joists.

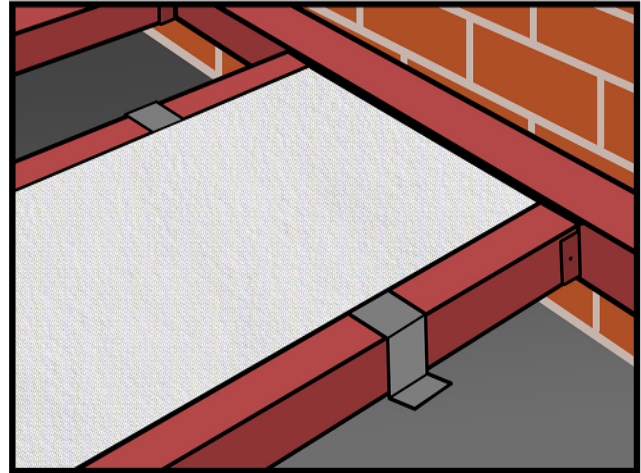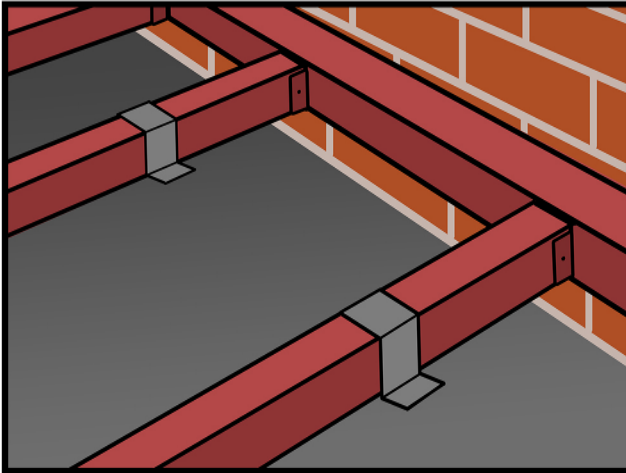

5.2 Start laying the floor boards from the rear left-hand side of the conservatory, looking towards the house. Use the off-cut from the last run to start the next. Always trim the boards to ensure the joins fall on a joist. It is advisable to glue the joins with waterproof wood glue. **All board joints should be staggered.**

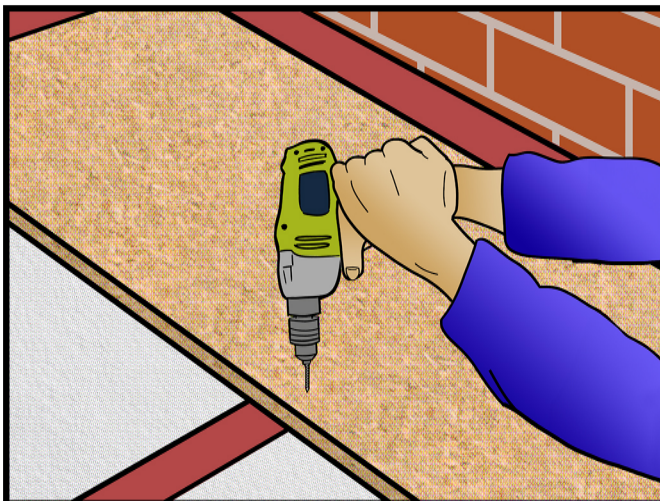

5.3 Secure the flooring to the joists using the **50mm self-tapping screws** supplied.

Your Durabase will include some 'Floor Edge Strips', they are plastic angles **approximately 2500mm** long. They are to be tucked under the edge of the chipboard flooring where it is unsupported by steelwork. e.g. where the joists disappear under the modular wall, and in the door aperture, they can be cut to length as required.

6. Durabase Plus Flooring



Note

This is a floating floor so if finishing with a floor tile or similar, we recommend seeking advice from your flooring supplier. If extra fixings are required, long self-drilling screws are available from Durabase (price on request).


Tip: It is advised to make a note of the joist centres so that lines can be drawn on the flooring to guarantee the correct fixing down positions into the steel joists.

6.0 Deck out the floor area with 9mm thick plyboard, fixing down with the **50mm self-drilling screws** supplied.



6.1 Once the 9mm ply is fitted, fill the same area with the underfloor insulation. The top of the insulation will finish flush with the top of the outer steel frame

6.2 Start laying the floor-boards directly onto the insulation from the rear left-hand side of the conservatory, looking towards the house. Lay the sheets the correct way up as marked. Use the off-cut from the last run to start the next. It is advisable to glue the joins with water-resistant wood glue.

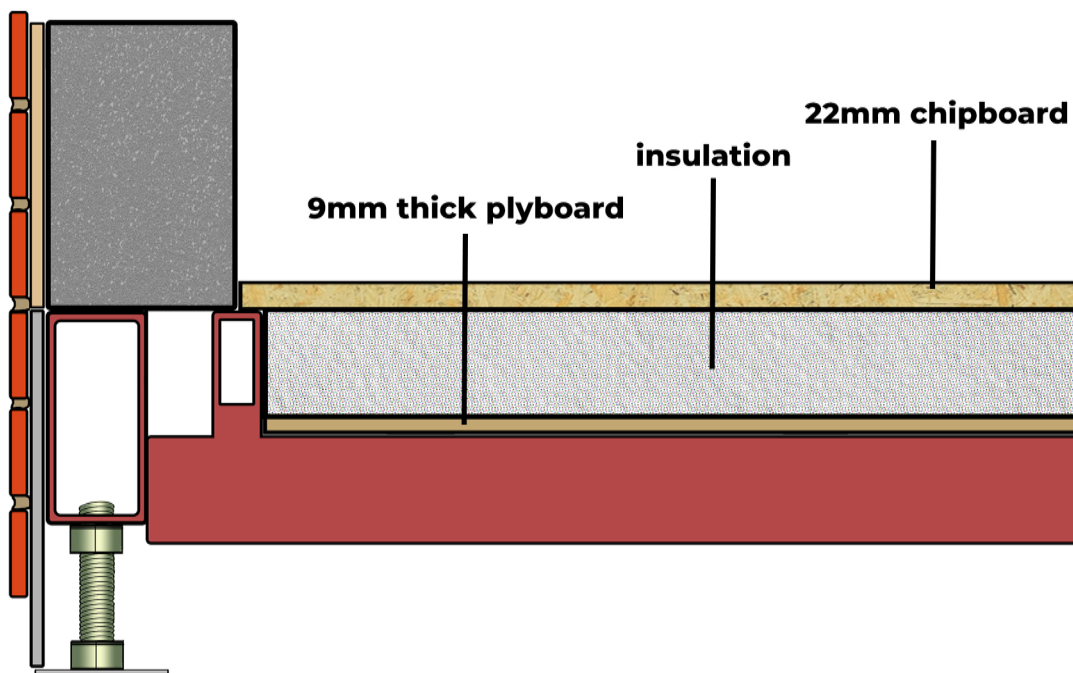

Note

It is recommended to allow a 10mm expansion gap around the outside edges of the flooring. The floor is now ready for finishing with your choice of covering.

7. Rendering Guidelines

We advise all work should be carried out by competently trained people who have experience using render.

For Render Walls when the walls are in position, there should be a gap of **approximately 3mm to 5mm** between the edges of the external render board for correct jointing.

DO NOT apply sand and cement, monocouche, dash or thick coat render system to the render board supplied.

Taping and Jointing

Immediately after installing the construction, protect the framework from weathering by filling all the joints. Fill the gaps between the board with exterior joint filler and then spread it over the face of the board, ready to take the tape.

Immediately embed **Exterior Joint Tape (10cm)** or **Exterior Reinforcing Tape**, centred over all of the joints. Scrape the excess exterior joint filler from the exterior tape leaving it just covered.

Cover the screw heads with exterior joint filler.

Corners are protected by applying an exterior basecoat, and then embedding a corner profile in a similar way to the joint tape.

Reinforce window and door corners with extra pieces of reinforcing mesh, cut to size **50cm x 30cm**, embedded into exterior basecoat as per corner profiles.

Finishing

Refer to installation instructions from the selected render supplier.

To prevent damage caused by prolonged periods of wetting, it is preferable to stop the render above DPC level. Render should be applied at a min 150mm above ground level and above DPC. If applied under a render drip should be used to stop damp bridging.

Please note that at the time of printing every care has been taken to ensure that these instructions are as accurate as possible.

We reserve the right to make modifications from time to time without notice to ensure the ongoing integrity of the product.

For technical assistance call 01432 266507

Project Notes

Durabase are looking for conservatory and extension projects that have used the Durabase system to include in future marketing campaigns, on our website and social media.

Enter your pictures for a chance to win a **£25 Amazon gift voucher and have a professional photographer come and capture your finished project*!**

To enter, submit one picture of the outside and one picture of the inside of your project by email to: **sales@durabase.co.uk**

Please include a small testimonial, the Durabase reference number, company purchased through and your address.

**By submitting this form, you agree to Durabase being able to use your testimonial or photos for our website and wider marketing campaigns. No personal information will be used in any marketing material or sold on to third parties. Gift voucher will be received on the day of our photographer visiting your property.*

**ENTER FOR
A CHANCE TO
WIN!**

